



**COMMERCIAL
HARDWARE**
BY BLACK & DECKER

QED300 series

Grade 1
Rim Exit Devices

Applications

The Standard Duty QED300 series exit devices are designed for multi-family, tenant improvement uses such as apartment complexes, retail/storefront, small office buildings and hotels/motels where a stylish, yet durable product is required.

Performance Features

- Tested to significantly exceed 500,000 cycles required for Grade 1 certification.
- Field sizeable. 36" to 32" door application (91.44cm)(81.28cm).
- Thru-Bolted design for increased security and durability.
- Consistent styling allows for suiting with other K2 Commercial Hardware products.

Certifications



- ANSI/BHMA A156.3 Series Grade 1
- UL/cUL Listed (3-hours) for "A" Label Single Door applications (4' x 8') (1.219mt x 2.438mt)
- UL10C/UBC 7-2 (1997) Positive Pressure Rated
- UL10B Pressure Rated
- UL305 for Panic Hardware
- ANSI A117.1 Accessibility Code (ADA Compliant)
- California State Reference Code (formerly Title 19 - Fire Marshall)

Product Specifications


- Handing – All QED300 series exit devices are non-handed.
- Door Thickness – 1 3/4" standard (44.5mm).
- Latchbolt – Stainless Steel 3/4" throw with deadlatch (19mm).
- Strike – Stainless Steel body with plated steel roller standard. Fire Rated stainless steel strike with stainless steel roller standard on QED313.
- Fasteners – Wood and machine screws standard. Sex bolts optional. (Standard on Fire Rated device).
- Head Cap & End Cap – Zinc die-cast.
- Trims – Pinnacle and Pearce styles available. Escutcheon Offering – Dummy, Passage, Keyed, Night Latch. Pull Plate Offering – Dummy, Thumbpiece, Night Latch, Flat Plate.
- Stile Width - 3 3/8" (98mm) Minimum.
- Dogging – Hex key dogging and cylinder dogging available.
- Standard Backset: 2 1/4" (57mm) to face of door stop.

Keying

- Offered with the following keyway options: KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent, BF-Best "F" (SCIF) & LC-Less Cylinder. (SFIC) offered keyed different only. Consult factory for details on Mortise and Rim Cylinder requirements.

Warranty

Lifetime Mechanical & 3 year finish

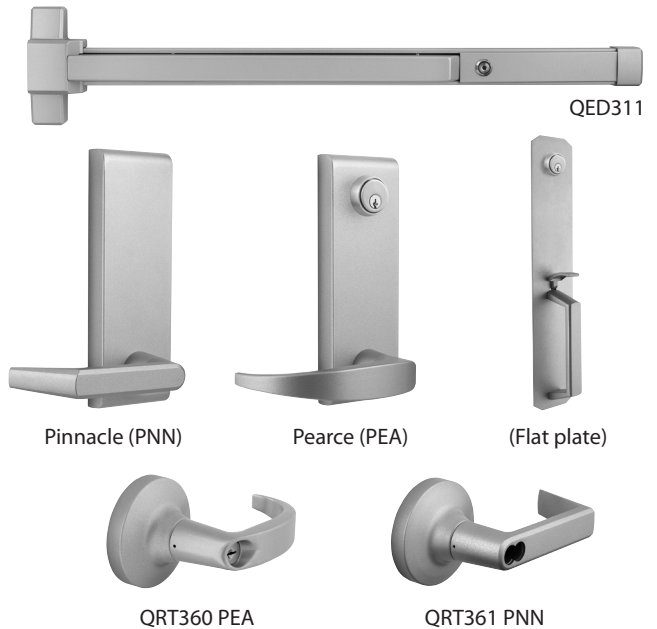

Exit Device Functions

K2	Description
QED311	Rim Hex Dog
QED312	Rim Cylinder Dog
QED313	Rim Fire Rated

Exit Trim Offerings

ANSI	K2	Description
02	QET320	Dummy Lever Escutcheon
02	QET325	Dummy Pull Plate
14	QET330	Passage Lever Escutcheon
08	QET360	Keyed Lever Escutcheon
05	QET365	Thumbpiece
09	QET370	Night Latch Lever Escutcheon
03	QET375	Night Latch Pull
01	QET390	Flat Plate
02	QRT320	Dummy Round Rose Lever
14	QRT330	Passage Round Rose Lever
08	QRT360	Keyed Round Rose Lever
09	QRT370	Night Latch Round Rose Lever

Finishes

BHMA	Description
689	Painted Aluminum
690	Painted Duranodic Bronze



**COMMERCIAL
HARDWARE**
BY BLACK & DECKER

QED300 series

Surface Vertical Rod Exit Devices

Applications

The Standard Duty QED300 series surface vertical rod exit devices are designed for multi-family, tenant improvement uses such as apartment complexes, retail/storefront, small office buildings and hotels/motels where a stylish, yet durable product is required.

Performance Features

- Tested to significantly exceed 500,000 cycles required for Grade 1 certification.
- Field sizeable. 36" to 32" door application (91.44cm)(81.28cm).
- Thru-Bolted trim design for increased security and durability.
- Consistent styling allows for suiting with other K2 Commercial Hardware products.

Certifications



- ANSI/BHMA A156.3 Series Grade 1
- UL/cUL Listed (1½-hours) for "B" Label Double Door applications (8' x 8') (2.438mt x 2.438mt)
- UL10C/UBC 7-2 (1997) Positive Pressure Rated
- UL10B Pressure Rated
- UL305 for Panic Hardware
- ANSI A117.1 Accessibility Code (ADA Compliant)
- California State Reference Code (formerly Title 19 - Fire Marshall)

Product Specifications


- Handing – All QED300 series exit devices are non-handed.
- Door Thickness – 1¾" standard (44.5mm).
- Door Height – 7' standard with 84" rods; 8' optional with 96" rods. (2.1336mt x 2.438mt)
- Latchbolt – ½" (12.7mm) Throw on top latch; ¾" (9.53mm) on bottom latch.
- Fasteners – Wood and machine screws standard. Sex bolts optional. (Standard on Fire Rated device).
- Head Cap & End Cap – Zinc die-cast.
- Trims – Pinnacle and Pearce styles available. Escutcheon Offering – Dummy, Passage, Keyed, Night Latch. Pull Plate Offering – Dummy, Thumbpiece, Night Latch, Flat Plate.
- Stile Width - 3½" (89mm) Minimum.
- Dogging – Hex key dogging and cylinder dogging available
- Standard Backset: 2 ¼" (57mm) to face of door stop.

Keying

- Offered with the following keyway options: KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent, BF-Best "F" (SCIF) & LC-Less Cylinder. (SFIC) offered keyed different only. Consult factory for details on Mortise and Rim Cylinder requirements.

Warranty

Lifetime Mechanical & 3 year finish

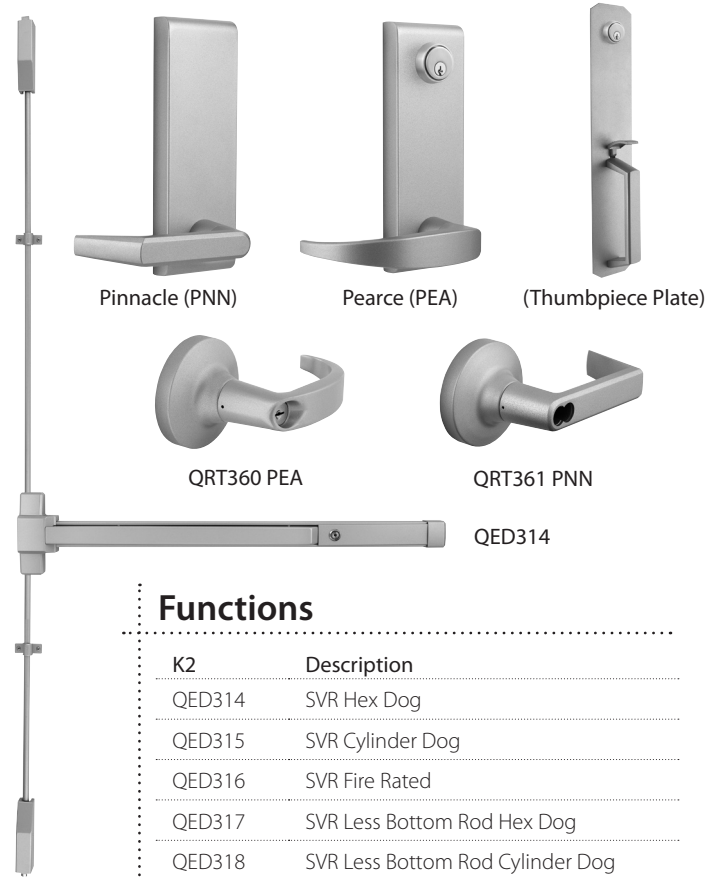

Functions

K2	Description
QED314	SVR Hex Dog
QED315	SVR Cylinder Dog
QED316	SVR Fire Rated
QED317	SVR Less Bottom Rod Hex Dog
QED318	SVR Less Bottom Rod Cylinder Dog
QED319	SVR Less Bottom Rod Fire Rated

Exit Trim Offerings

ANSI	K2	Description
02	QET320	Dummy Lever Escutcheon
02	QET325	Dummy Pull Plate
14	QET330	Passage Lever Escutcheon
08	QET360	Keyed Lever Escutcheon
05	QET365	Thumbpiece
09	QET370	Night Latch Lever Escutcheon
03	QET375	Night Latch Pull
01	QET390	Flat Plate
02	QRT320	Dummy Round Rose Lever
14	QRT330	Passage Round Rose Lever
08	QRT360	Keyed Round Rose Lever
09	QRT370	Night Latch Round Rose Lever

Finishes

BHMA	Description
689	Painted Aluminum
690	Painted Duranodic Bronze